

# ITT


**BAQUABII**

**Residential and  
Commercial Water Systems**

## Goulds Pumps

### AquaBoost™ II

Variable Speed Constant Pressure Systems

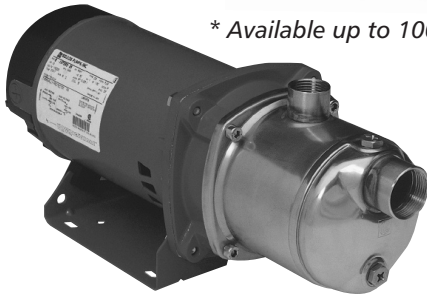

\* Available up to 100 GPM systems

#### FEATURES

The AquaBoost II variable speed pump controller and complete booster package kits, provide an economical answer for municipal water district customers with low water pressure. Both domestic and light commercial applications can benefit. As water use increases, the AquaBoost II changes pump speed to maintain pressure. Large supply tanks are eliminated and less wear and tear on your pump and motor.

#### Think of it as "Cruise Control" for your pump!


The AquaBoost II is available with a range of flow rates to handle homes with up to four baths, irrigation, filtration and fire suppression systems. Light commercial applications up to 100 GPM at 45 PSI boost. The AquaBoost II is available as either a separate controller or as part of a complete pump package with everything you need to plumb it to a domestic water line.




Goulds Pumps is a brand of ITT Corporation.

[www.goulds.com](http://www.goulds.com)

*Engineered for life*

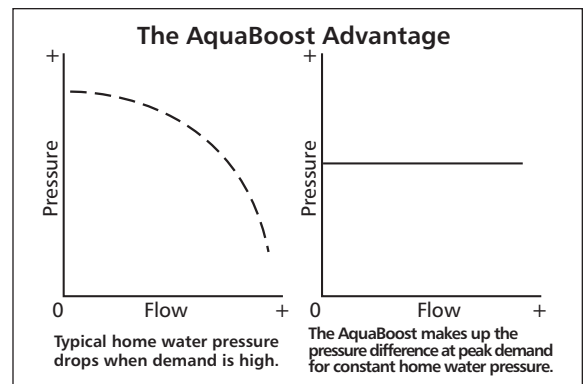



# ITT

## GOULDS PUMPS

### Residential and Commercial Water Systems

#### COMPONENTS

---

**\*1AB2** — 4.2 Amp, 208-230 V, single phase input, 1 HP AquaBoost II variable speed controller, wall mount set, transducer, pre-wired. (Pump and tank not included.)

**\*1AB2LB1035** — 1 HP AquaBoost II controller, wall mount set, LB stainless steel jet pump, transducer, V6P tank, pressure gauge, discharge tee. Controller is pre-wired to the pump. Flows to 15 GPM.

**2AB2** — 6.9 Amp, 208-230 V, single phase input, 2 HP AquaBoost II variable speed controller, wall mount set, transducer, pre-wired. (Pump and tank not included.)

**2AB21MC1F2B2** — 2 HP AquaBoost II controller, wall mount set, MCC cast iron / stainless steel pump, transducer, V6P (2 gal.) tank and pressure gauge. Controller is pre-wired. Flows to 27 GPM.

**2AB21MC1G2A2** — 2 HP AquaBoost II controller, wall mount kit, MCC cast iron / stainless steel pump, transducer, V6P (2 gal.) tank and pressure gauge. Controller is pre-wired. Flows to 32 GPM.

**⚠ CAUTION** AquaBoost System CANNOT be set above 80 psi, for the total discharge pressure (suction plus discharge).

**\*1AB21HM1E2D0** — 1 HP AquaBoost II controller, wall mount kit, HMS stainless steel pump, transducer, V6P (2 gal.) tank and discharge pipe tee. Controller is pre-wired. Flows to 20 GPM.

**\*1AB22HM1E2D0** — 1 HP AquaBoost II controller, wall mount kit, HMS stainless steel pump, transducer, V6P (2 gal.) tank, pressure gauge and discharge pipe tee. Controller is pre-wired. Flows to 30 GPM.

**2AB22HM1F2E0** — 2 HP AquaBoost II controller, wall mount kit, HMS stainless steel pump, transducer, V6P (2 gal.) tank, pressure gauge and discharge pipe tee. Controller is pre-wired. Flows to 30 GPM.

**3AB2LCB1H2D0** — 3 HP AquaBoost II controller, wall mount kit, LCB stainless steel pump, transducer, V6P (2 gal.) tank, pressure gauge and discharge pipe tee. Controller is pre-wired. Flows to 50 GPM.


**2AB22MC1G2D2** — 2 HP AquaBoost II controller, wall mount kit, MCC cast iron/stainless steel impeller pump, pressure transducer, V6P (2 gal.) tank, pressure gauge, 1¼" bronze discharge tank tee. Controller and motor are pre-wired. Flows to 80 GPM.

**\*\*5AB22MC1J2K2** — 5 HP AquaBoost II controller, wall mount, MCC cast iron/stainless impeller pump, pressure transducer, pressure gauge, 1¼" bronze tank tee, controller and motor are pre-wired. Flows to 100 GPM.

**\*\*5AB2LCC1J2D0** — 5 HP AquaBoost II controller, wall mount, LCC stainless steel pump, pressure transducer, pressure gauge, 1¼" bronze tank tee, controller and motor are pre-wired. Flows to 70 GPM.

**\* 1 HP available in 115 volt models.**

**\*\* Tank not included.**



# ITT

## GOULDS PUMPS Residential and Commercial Water Systems

### AQUABOOST II SYSTEM SELECTION

PSI BOOST	2-10 GPM	20 GPM	30 GPM	40 GPM	50 GPM	60 GPM	70 GPM	80 GPM	90 GPM	100 GPM
20	1	3	3	5	5	9	9	9	10	10
25	1	3	3	6	9	9	9	10	10	10
30	1	3	3	6	9	10	10	10	10	10
35	1	3	3	6	6	10	10	10	10	10
40	1	3	3	6	7	10	10	10	10	10
45	1	3	3	6	8	10	10	10	10	10
50	1	3	4	7	8	10	10	10	10	
55	1	3	4	7	8	10	10			
60	1	4	7	8	8					
65	2	4	7	8	8					
70	2	4	8	8						
75	4	4	8							
80	4									

*1	<b>1AB2LB1035</b> (1 HP, stainless steel pump, 1" discharge, 1¼" suction)
*2	<b>1AB21HM1E2D0</b> (1 HP, stainless steel pump, 1" discharge, 1¼" suction)
*3	<b>1AB22HM1E2D0</b> (1 HP, stainless steel pump, 1" discharge, 1¼" suction)
4	<b>2AB22HM1F2E0</b> (1½ HP, stainless steel pump, 1" discharge, 1¼" suction)
5	<b>2AB21MC1F2B2</b> (1½ HP, cast iron pump, 1" discharge, 1¼" suction)
6	<b>2AB21MC1G2A2</b> (2 HP, cast iron pump, 1" discharge, 1¼" suction)
7	<b>3AB2LCB1H2D0</b> (3 HP, stainless steel pump, 1" discharge, 1¼" suction)
8	<b>5AB2LCC1J2D0</b> (5 HP, stainless steel pump, 1" discharge, 1½" suction)
9	<b>2AB22MC1G2D2</b> (2 HP, cast iron pump, 1¼" discharge, 1½" suction)
10	<b>5AB22MC1J2K2</b> (5 HP, cast iron pump, 1¼" discharge, 1½" suction)

\* 1 HP available in 115 volt input models. See Price Pages.

Items # 8 and #10 do not include tank. Recommend at least 13 gallon volume bladder tank.

**NOTE:** PSI is boosting pressure, NOT total system pressure.



# ITT

## GOULDS PUMPS

### Residential and Commercial Water Systems

#### AQUABOOST CONTROLLER FEATURES

Input Power\* — 208-230V  $\pm$ 15%, single phase (controller only)

Output Power — Up to 230V three phase (based on input voltage). Motor rated for 208-230V,  $\pm$ 10%.

Maximum Output Current — 4.2 amps – 1AB2 (1 HP)  
— 6.9 amps – 2AB2 (2 HP)

Input Controls — Up and down buttons to set pressure.

Signal Lights — Power on, pump running, inverter stopped, pump stopped, standby, faults/errors.



Electrical Efficiency — Over 95% at full load

Protection Against — Short circuit, under voltage, overload, motor temperature, dead heading, run out, suction loss, sensor fault, bound pump, over voltage, static discharge. **Note:** Suction loss/run out is set for minimum 10 psi at discharge!

Ambient Temperature — 34° F to 104° F

Maximum Humidity — 95% at 104° F, non-condensing

Air Pollution — Avoid mounting in areas with excessive dust, acids, corrosives and salts.

Approvals —  

Controller Enclosure — Outdoor, NEMA 3R, IP 43 (Rain-tight)

Mounting — Wall mount with mounting hardware.

Cooling — Convection with cast aluminum heat sink.  
— 3 HP, 5 HP with temp. fan.

Transducer — 0.5 - 4.5 VDC with 5 VDC power supply, 100 psi range, 80-inch 3-wire shielded cable.

Input Wire — 5 feet of 14, 10 or 8 gauge cable.

Depending on size, cable is pre-wired to controller and motor conduit box.

Output Wire — 10 feet of 14 gauge cable. Cable is pre-wired to controller and pump motor (when provided).


\*Low input voltage may affect motor operation.


#### PRESSURE RANGE

Nominal Range — Field adjustable from 20 - 80 psi, total system pressure.



**DO NOT SET REQUIRED SYSTEM PRESSURE ABOVE 80 PSI. SEVERE DAMAGE TO PLUMBING COULD RESULT. PLUMB RELIEF VALVE OUTSIDE OR DRAIN.**

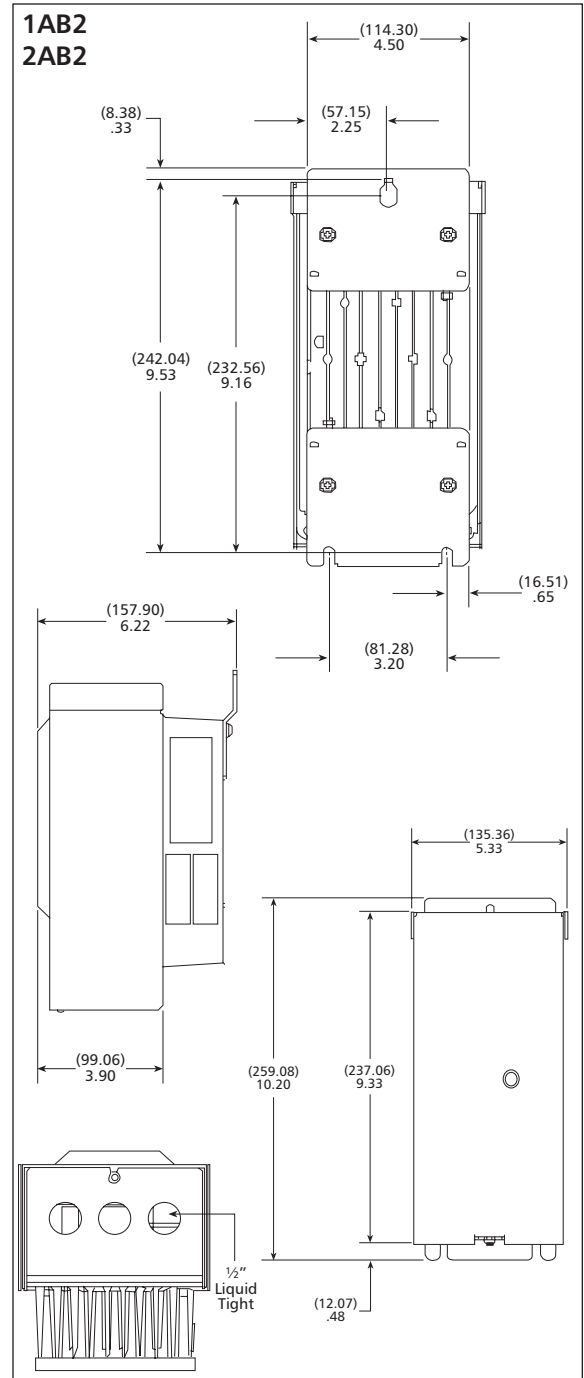



# ITT

## GOULDS PUMPS Residential and Commercial Water Systems

### SUGGESTED AQUABOOST INSTALLATION FOR MUNICIPAL WATER SYSTEM

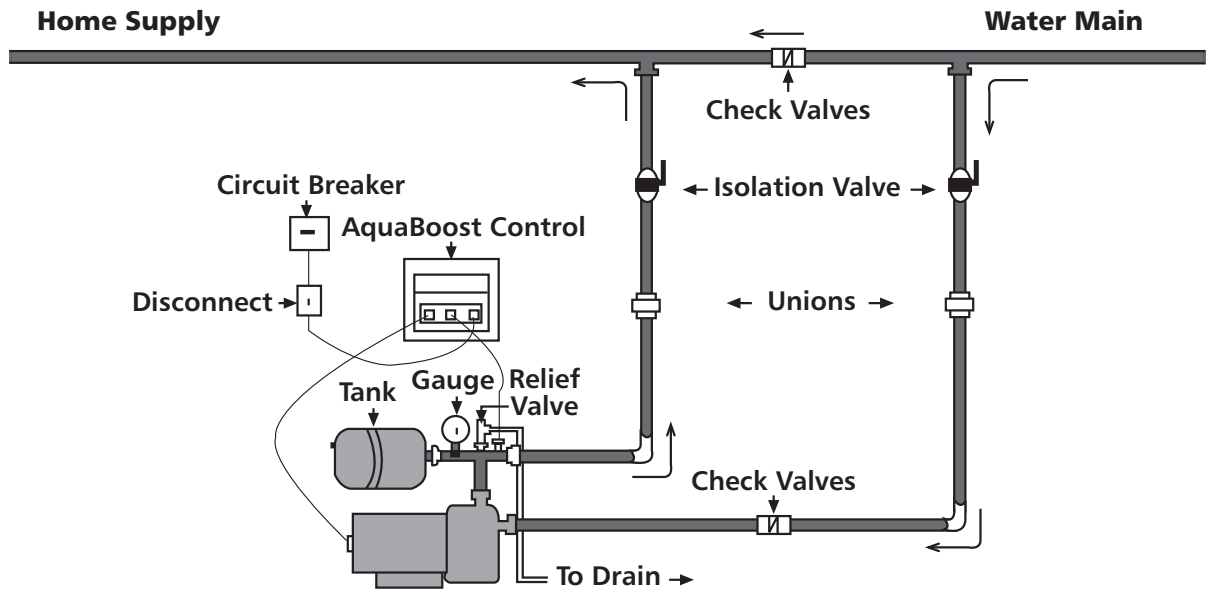


Figure 1

### SUGGESTED AQUABOOST INSTALLATION FOR WELL PUMP SYSTEM




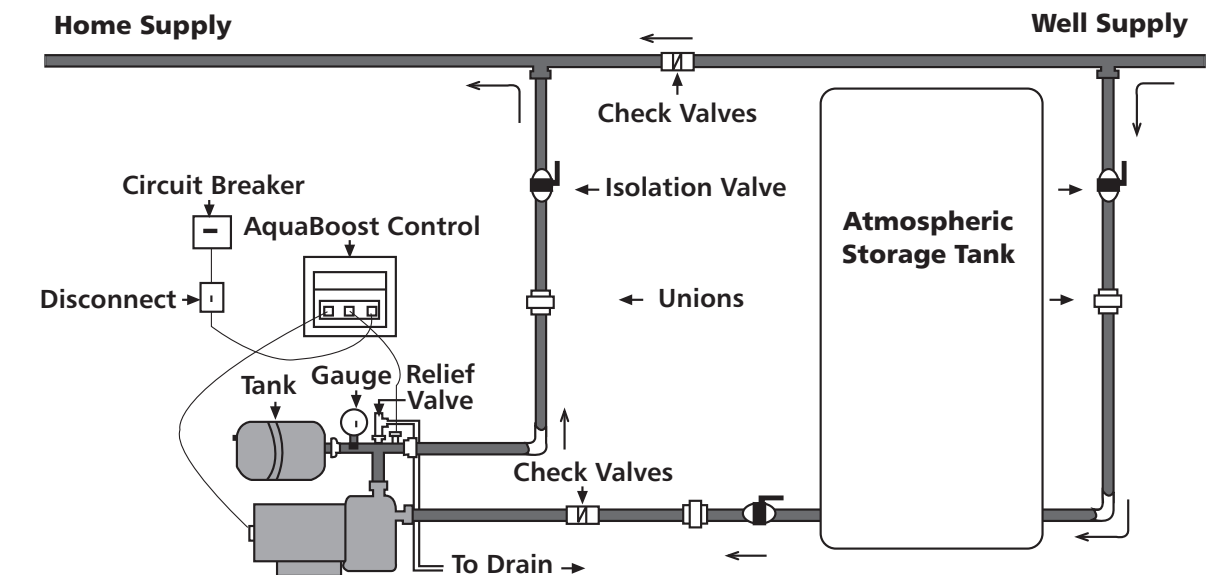


Figure 2

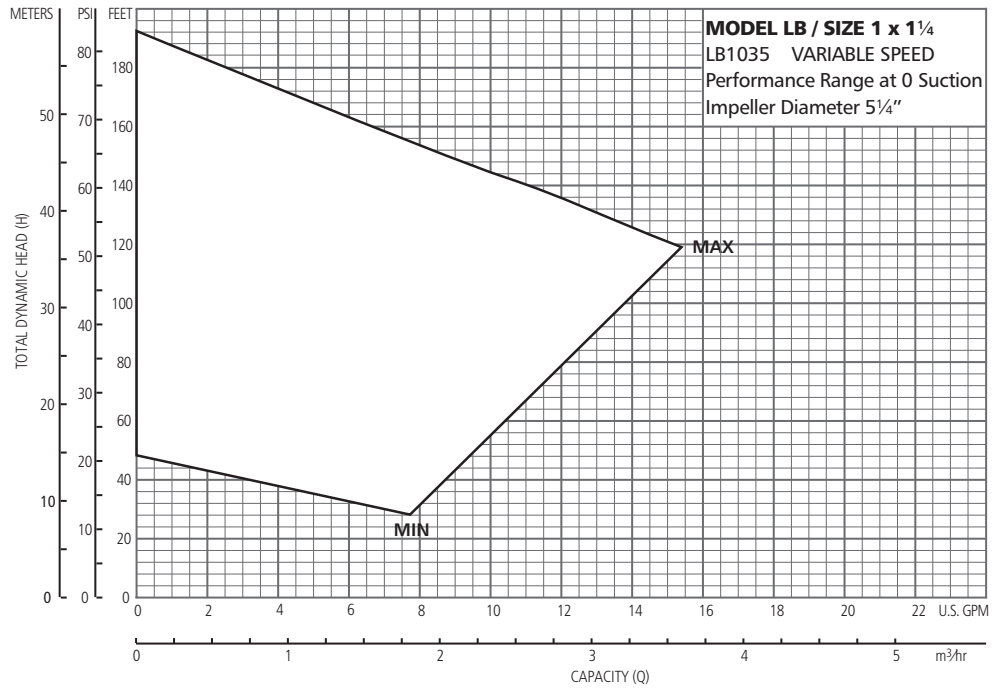

# ITT


## GOULDS PUMPS Residential and Commercial Water Systems

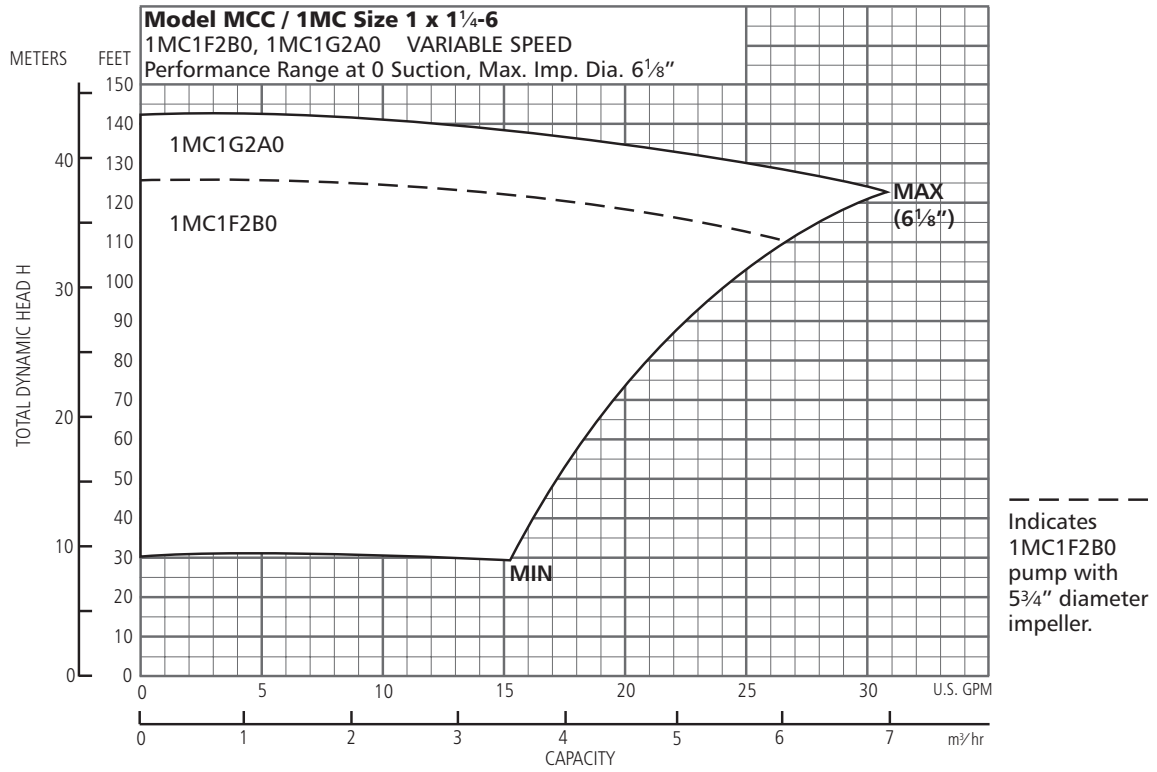




# ITT

## GOULDS PUMPS Residential and Commercial Water Systems


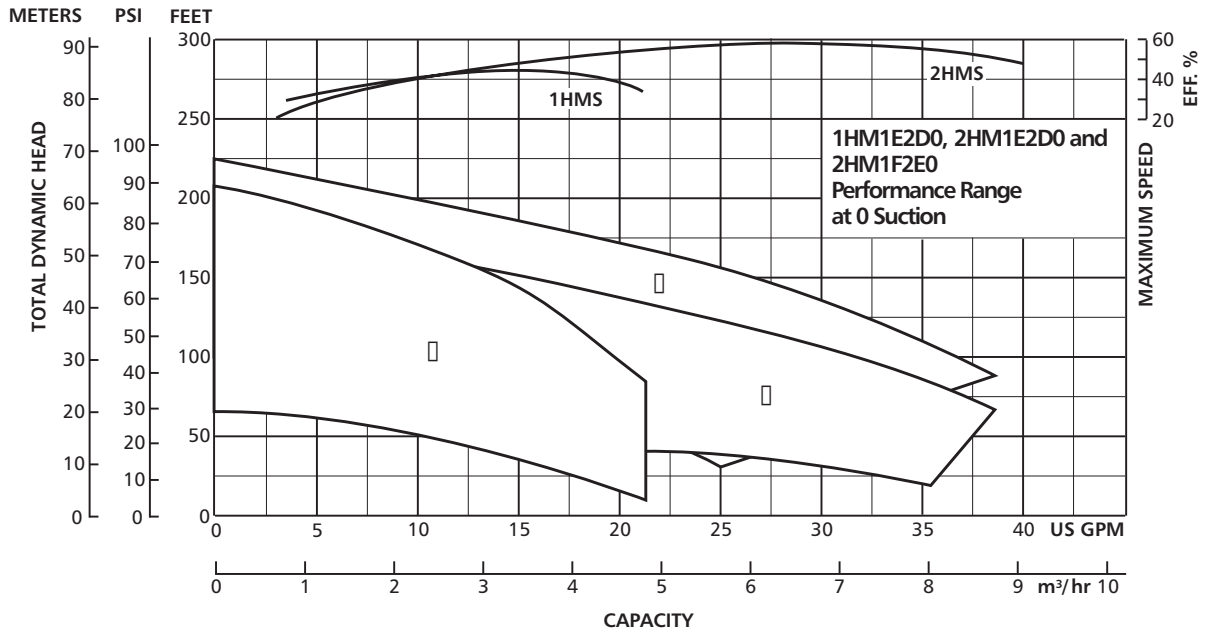


- ① Curve represents pump model 1HM1E2D0.
- ② Curve represents pump model 2HM1E2D0.
- ③ Curve represents pump model 2HM1F2E0.



# ITT

## GOULDS PUMPS Residential and Commercial Water Systems

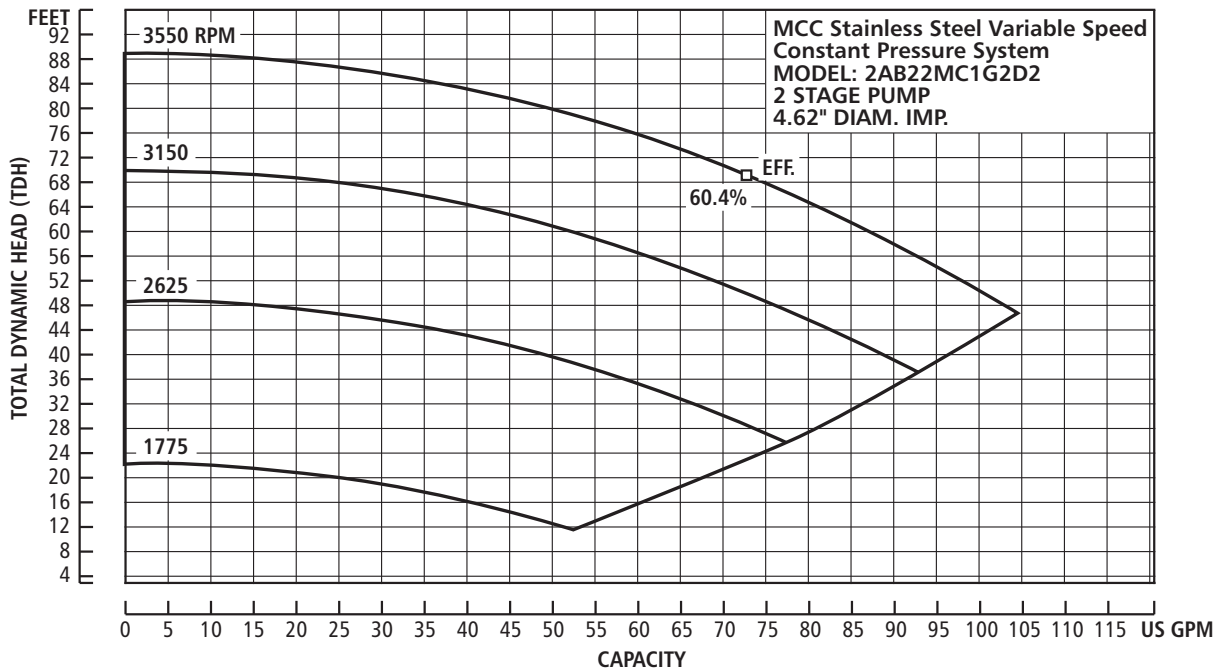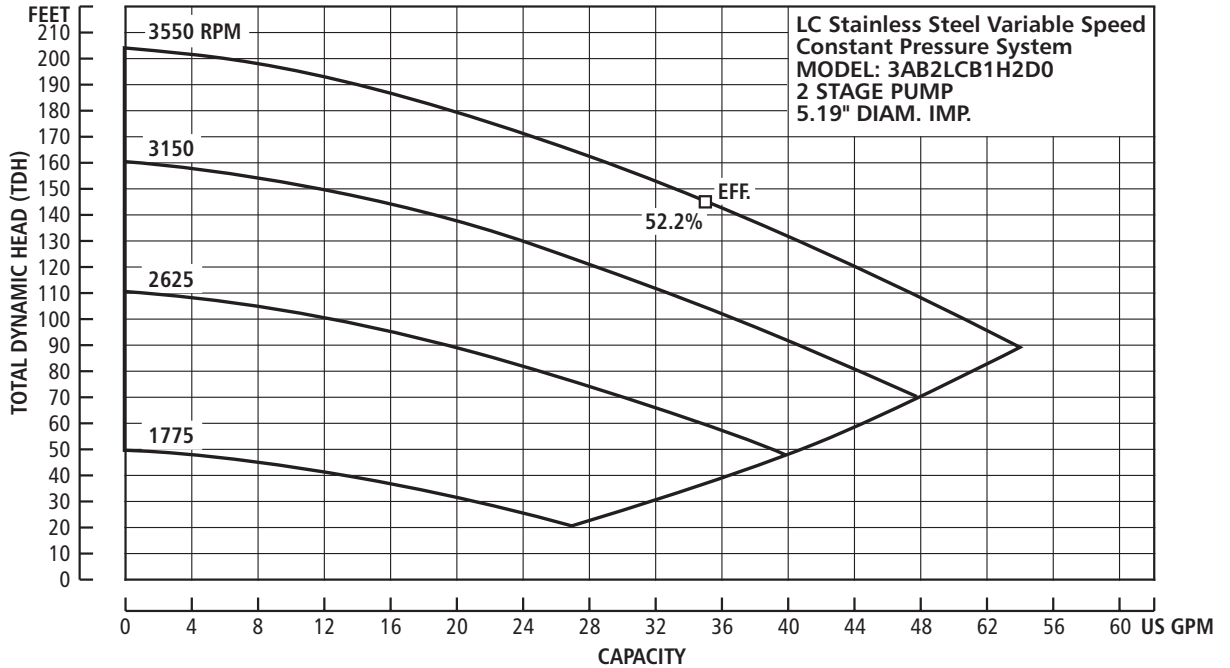



NOTE: Curves indicate boost pressure.






# ITT

## GOULDS PUMPS Residential and Commercial Water Systems

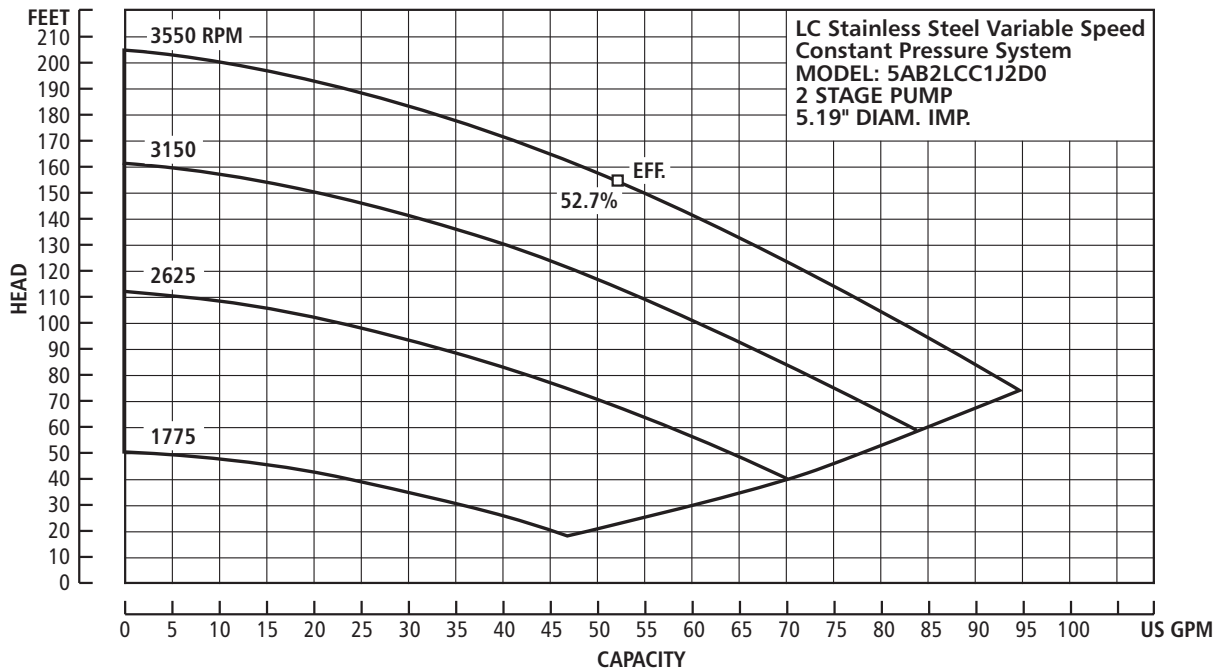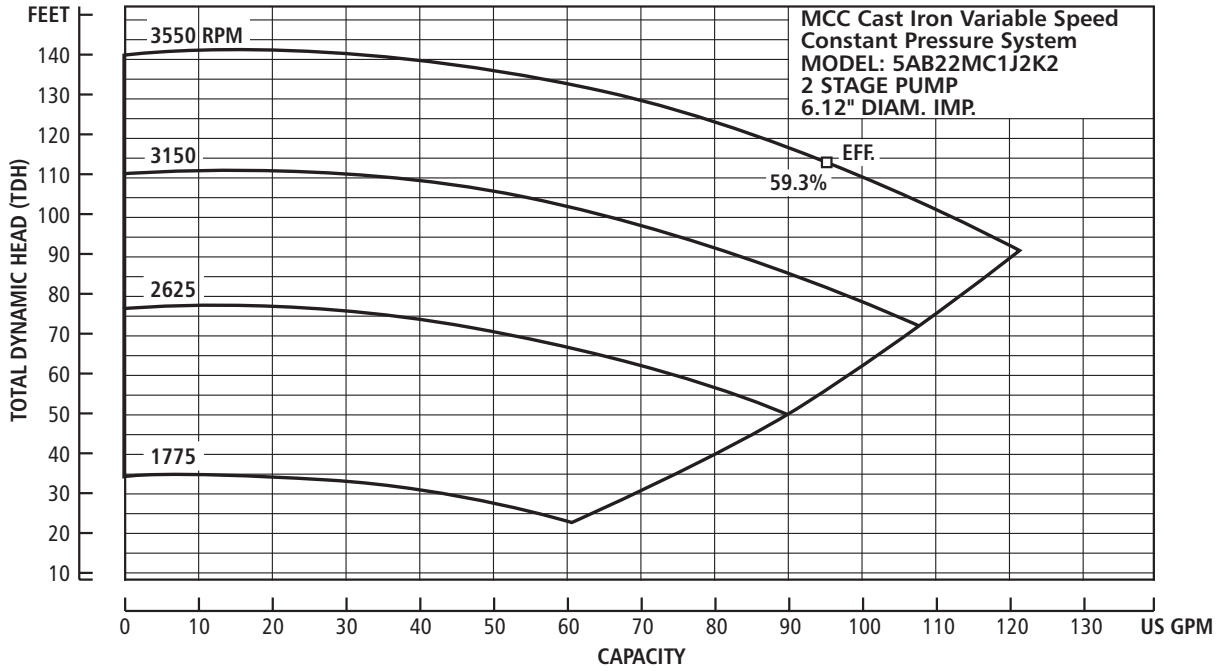

NOTE: Curves indicate boost pressure.



# ITT

## GOULDS PUMPS Residential and Commercial Water Systems

### DIMENSIONS

#### LB PUMP (LB1035) WITH TANK AND TEE

**Capacities** — to 15 GPM

**Rotation** — Right hand clockwise, viewed from motor end

**Materials** — 304 stainless steel casing  
Noryl impeller

**Motor** — 1 HP, ODP, Three Phase,  
208-230/460V

**Pipe Connections** — 1 x 1 1/4 NPT

**Maximum Temperature of Water** — 120° F


**NOTE:** Tank Liquid Temperature Limit is 120° F  
Pump Liquid Temperature Limit is 140° F

**Maximum System Working Pressure** — 85 psi

**Seal** — Carbon / Silicon Carbide / EPR

*Overload protection, starters, heaters not required.*

*Dimensions are in inches.*

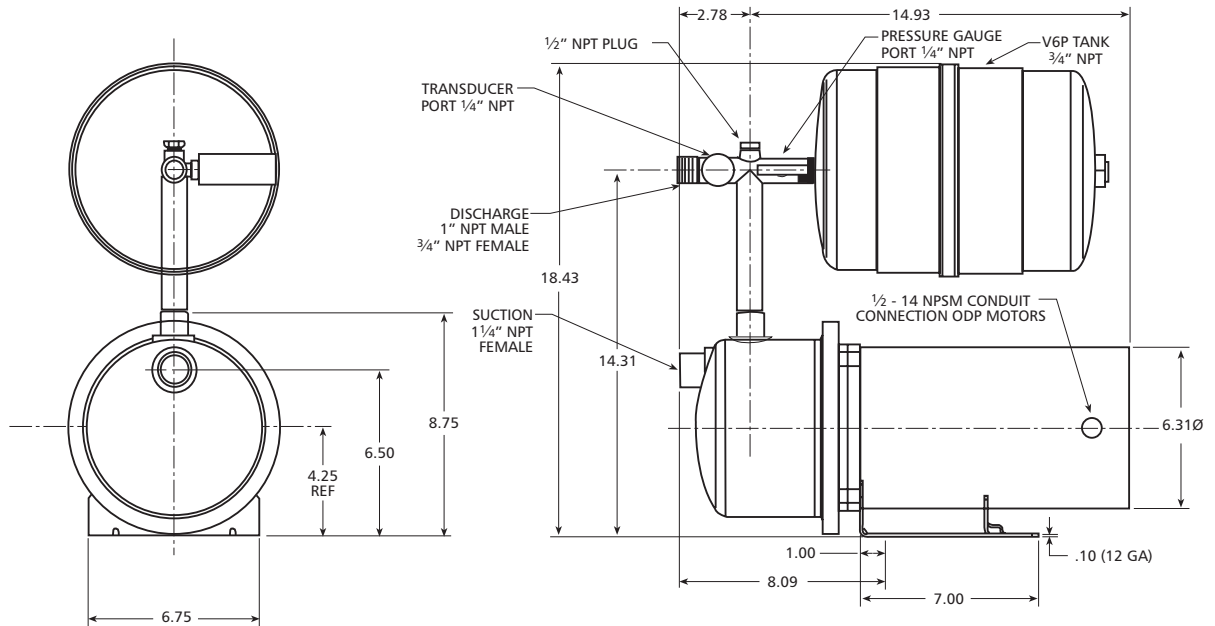

*Approximate Packaged Shipping Weight — 55 lbs.*



# ITT

## GOULDS PUMPS Residential and Commercial Water Systems

### DIMENSIONS

#### MCC PUMP (1MC1G2A2 AND 1MC1F2B2) WITH TANK AND TEE

**Capacity** — to 32 GPM (1MC1G2A2)  
— to 27 GPM (1MC1F2B2)

**Rotation** — Right hand clockwise, viewed from motor end

**Materials** — Cast iron casing  
316 stainless steel impeller

**Motor** — 1½ HP, ODP, Three Phase, 208-230/460V  
— 2 HP, ODP, Three Phase, 208-230/460V


**Pipe Connections** — 1 x 1¼ NPT

**Maximum Temperature of Water** — 120° F  
**NOTE:** Tank Liquid Temperature Limit is 120° F  
Pump Liquid Temperature Limit is 212° F

**Maximum System Working Pressure** — 85 psi

**Seal** — Carbon / Silicon Carbide / EPR

*Overload protection, starters, heaters not required.  
Dimensions are in inches.*

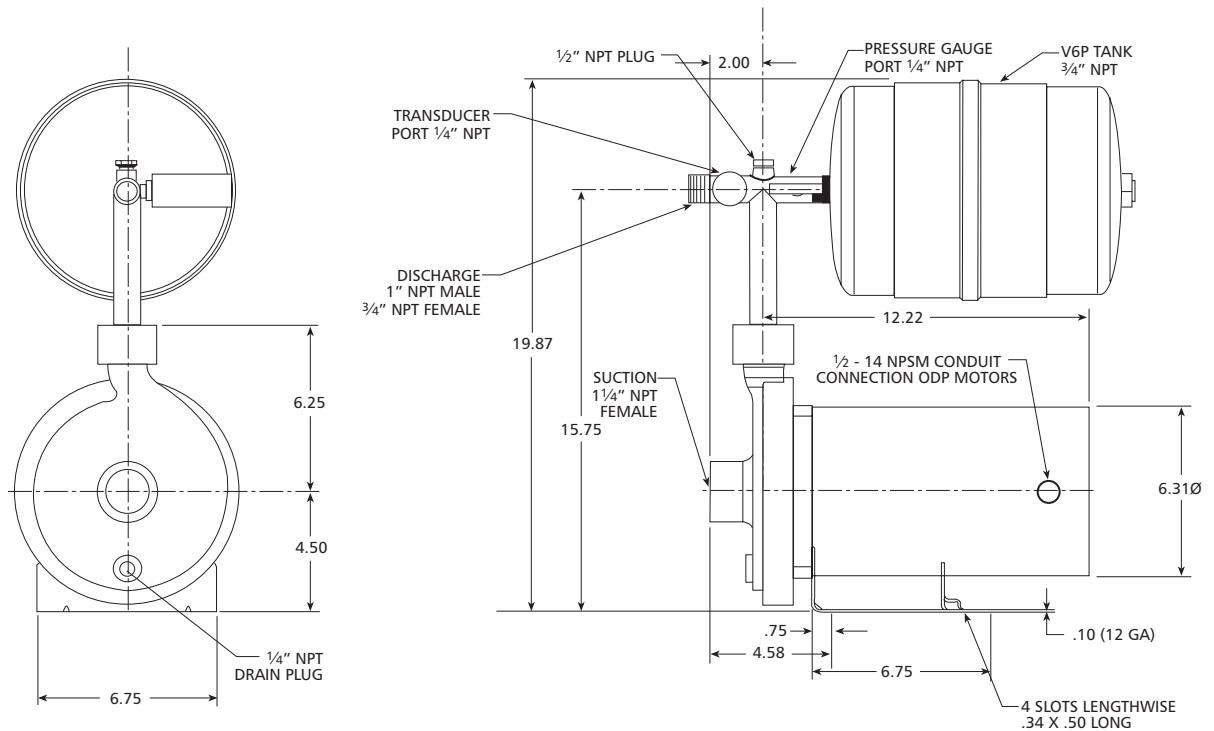

Approximate Packaged Shipping Weight — 75 lbs.



# ITT

## GOULDS PUMPS Residential and Commercial Water Systems

### DIMENSIONS

#### HMS PUMPS (1HM1E2D0, 2HM1E2D0)

**Capacities** — to 20 GPM (1HM)  
to 38 GPM (2HM4/2HM5)

**Rotation** — Right hand clockwise, viewed from motor end

**Materials** — 316L stainless steel for all liquid handling components

**Motor** — 1 HP, ODP, Three Phase, 208-230/460V (1HM/2HM4)  
— 1.5 HP, ODP, Three Phase, 208-230/460V (2HMS5)

**Pipe Connections** — 1 x 1¼ NPT


**Maximum Temperature of Water** — 120° F

**NOTE:** Tank Liquid Temperature Limit is 120° F  
Pump Liquid Temperature Limit is 212° F

**Maximum System Working Pressure** — 85 psi

**Seal** — Carbon / Silicon Carbide / EPR

*Overload protection, starters, heaters not required. Dimensions are in inches.*

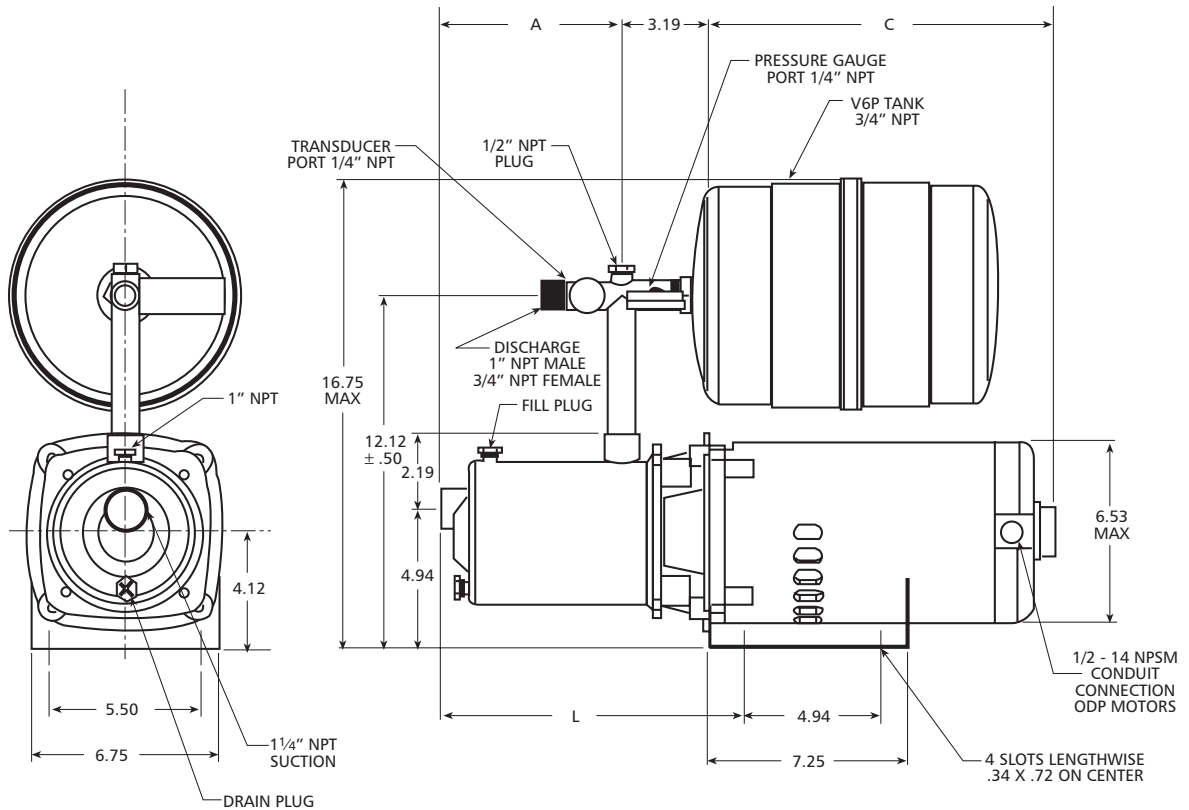

AQUABOOST	A	L	C	MOUNTING
1AB22HM1E2D0	5.75	10.75	11.62	View B
1AB21HM1E2D0	5.75	10.75	11.12	View A
2AB22HM1F2E0	6.73	11.75	11.62	View B

*Approximate Packaged Shipping Weight — 55 lbs.*



# ITT

## GOULDS PUMPS Residential and Commercial Water Systems

---

**ALTERNATE PUMP MODELS FOR USE WITH 1AB2 CONTROLLER**

---

MCC — 1/2, 3/4, 1 HP, 3 ph, ODP or TEFC motor versions  
 3642 — 1/3, 1/2, 1 HP, 3 ph, ODP or TEFC motor versions  
 GT073, GT103 — 3 ph, ODP or TEFC motor versions  
 HSC07, HSC10 — 3 ph, ODP or TEFC motor versions  
 HMS — 1/2, 3/4, 1 HP, 3 ph, ODP or TEFC motor versions  
 5GB, 7GB — 1/2, 3/4, 1 HP, 3 ph, ODP or TEFC motor versions  
 NPE — 1/2, 3/4, 1 HP, 3 ph, ODP or TEFC motor versions  
 NPO — 1/2, 3/4, 1 HP, 3 ph, ODP or TEFC motor versions  
 MCS — 1/2, 3/4, 1 HP, 3 ph, ODP or TEFC motor versions  
 ICS — 1/2, 3/4, 1 HP, 3 ph, ODP or TEFC motor versions  
 LB — 1/2 and 3/4 HP, 3 ph, ODP or TEFC motor versions

Submersible Pumps — Additional, external load filters and programming required. Consult factory.

**Note:** These pumps are not currently offered as a packaged kit, from Goulds Pumps.

All units require three phase motors.

Size pumps and controllers according to service factor amps of the motor.

---

**ALTERNATE PUMP MODELS FOR USE WITH 2AB2 CONTROLLER**


---

3642 — 1 1/2, 2 HP, 3 ph, ODP or TEFC motor versions  
 GT — 1 1/2, 2 HP, 3 ph, ODP or TEFC motor versions  
 HSC — 1 1/2, 2 HP, 3 ph, ODP or TEFC motor versions  
 HMS — 1 1/2 HP, 3 ph, ODP or TEFC motor versions  
 10GB — 1 1/2, 2 HP, 3 ph, ODP or TEFC motor versions  
 NPE — 1 1/2, 2 HP, 3 ph, ODP or TEFC motor versions  
 NPO — 1 1/2, 2 HP, 3 ph, ODP or TEFC motor versions  
 MCS — 1 1/2, 2 HP, 3 ph, ODP or TEFC motor versions  
 ICS — 1 1/2, 2 HP, 3 ph, ODP or TEFC motor versions

**Note:** These pumps are not currently offered as a packaged kit, from Goulds Pumps.

All units require three phase motors.

Size pumps and controllers according to service factor amps of the motor.



**ITT**

**GOULDS PUMPS**  
Residential and Commercial Water Systems

---

**PACKAGED HARDWARE WITHOUT PUMP AND MOTOR (SEE PRICING PAGE)**

---

Part Number 15K40

**KIT INCLUDES:**

- 1) Tank – V6P (2 gal.)
- 2) 1" Bronze Discharge Tee – AV 20-6
- 3) Pipe Plug – ½", 6K68
- 4) Pressure Gauge – AG5 (1 – 100 PSI)




**ITT**

**GOULDS PUMPS**  
Residential and Commercial Water Systems

**NOTES**

---



**ITT**

**Residential and  
Commercial Water Systems**



Goulds Pumps, AquaBoost and the ITT Engineered Blocks Symbol are registered trademarks and tradenames of ITT Corporation.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

**BAQUABII August, 2008**

Copyright (c) 2008 ITT Corporation

*Engineered for life*